


## THE RIGHT PUMP FOR TOUGH JOBS

# SKG SERIES

# SUBMERSIBLE SOLIDS HANDLING PUMPS FOR FLUSHABLE WIPES AND OTHER HARD TO PUMP SOLIDS



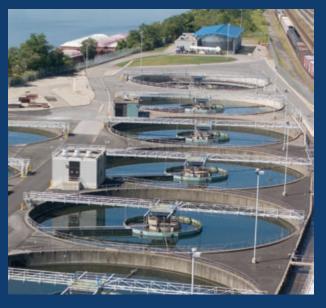

- INNOVATIVE, UNIQUE PATENT-PENDING DESIGN FOR RADIAL/AXIAL SHREDDING.
- EFFICIENT, HIGH SOLIDS PASSAGE IMPELLER & VOLUTE DESIGN.
- HIGH TORQUE 4-POLE MOTOR.

PATENT PENDING RAD-AX®
DUAL SHREDDING TECHNOLOGY

# **SKG SERIES**

The SKG Series pumps obliterate flushable wipes and other difficult solids in wastewater applications. Featuring innovative patent-pending **Dual Shredding RAD-AX® Technology** and robust construction, the SKG Series offers optimal performance, reduced maintenance and longer life - which means significant savings.

## **Superior Solids Handling Technology**

- Flushable Wipes
- Rags
- Diapers
- Metal Cans
- Disposable Diapers
- Fibrous Solids
- Plastics
- Food Waste
- Sanitary Napkins
- Wash Cloths



## The Solution For Tough Applications

- Water Treatment Facilities
- Shopping Malls
- Airports
- Prisons
- Aquatic Parks
- Bus Stations
- Hospitals

- Food Processing Plants
- Research Centers
- Bottling Plants
- Campgrounds
- Industrial Parks
- Dairies
- **Trailer Parks**

## **DUAL SHREDDING RAD-AX® TECHNOLOGY**

### The RAD:

Radial Shredding & Mascerating Rotating cutter bar with serrated cutting edges, traps and shreds solids against the sharp grooves of the radial cutting ring. Wipes and other fibrous debris are ripped apart with ease.

## The AX:

**Axial Shredding & Cutting** 

Dual cutting elements operate in tandem to multiply shearing action. As the material exits the radial shredding area, the axial cutting components shear any remaining pieces by way of multiple cutting bars. Impeller design expedites flow and hydraulic performance, preventing clogs.

## RAD-AX™

Construction

Features 440C Hardened SS on all shredding elements and a high torque, 4-pole motor, to ensure difficult solids are handled more efficiently. Impeller and suction cover are constructed of chrome iron for added durability, long life and trouble free performance.







A Revolutionary Innovation For Solids Handling

## **SKG SERIES FEATURES & BENEFITS DUAL SHREDDING TECHNOLOGY (PATENT PENDING)** (Hardened 440C Stainless Steel Cutting Components) HIGH EFFICIENCY MOTOR (High-torque, 4-pole motor in 2, 3, & 5HP) **IMPELLER DESIGN & CONSTRUCTION** (High-efficiency, 2-vane, chrome iron impeller & suction cover) 33 FT POWER CABLE AND SEAL MINDER CABLE (SOOW, UL/CSA/MSHA approved - Custom lengths available) **CABLE ENTRY SEALING SYSTEM** (FKM compression fitting with SS gland nut to hold and seal cable. Individually isolated and potted power leads to prevent wicking) **HEAVY DUTY LIFTING RINGS** (Reinforced for lifting and lowering of pump) **OVERSIZED BEARINGS & SHAFT** (To handle extra torque and loads) **DOUBLE MECHANICAL SEALS** (Oil lubricated double seal design with upper (silicon carbide vs. carbon) and lower (silicon carbide vs. silicon carbide) SUPERIOR MOTOR INSULATION & SS MOTOR HOUSING (Class F insulation, SS motor housing for superior corrosion resistance and longer life)

(Protects motor from thermal and amperage overloads)

## Seal Minder® MOISTURE **DETECTION SYSTEM** (Provides early warning to

protect motor) Requires Seal Minder® relay in Control Panel.

### FLEXIBLE DISCHARGE CONNECTION


(ANSI flange or NPT discharge)

#### SLIDE RAIL INSTALLATIONS


(Easily adapts to slide rails)

## **PUMP STAND**

(Can be removed for slide rail installation)

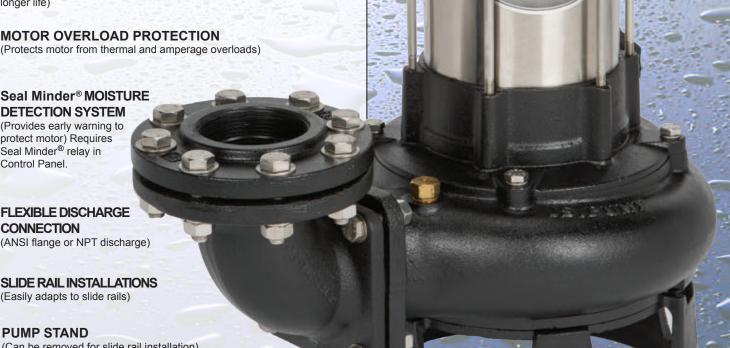

## RAD-AX®SHREDDING TECHNOLOGY

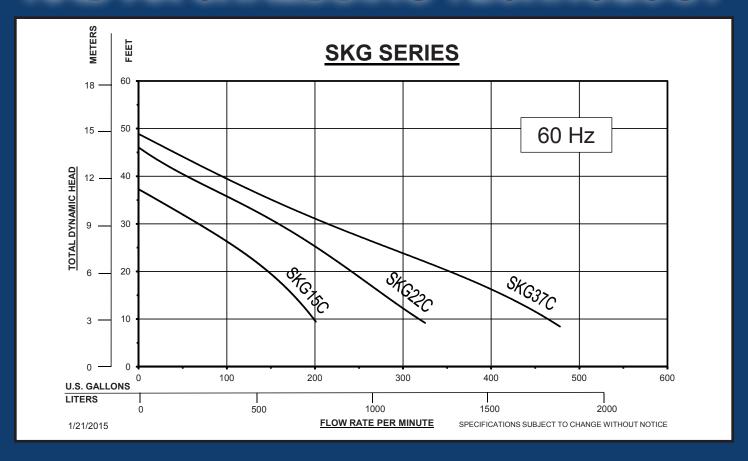

MODEL	DISCH. SIZE	H.P.	VOLT	PHASE	RPM	RATED AMPS	MAX HEAD	MAX GPM	HEIGHT	WIDTH	PUMP- WEIGHT LBS	EST. SHIP WEIGHT LBS
SKG15C	3"	2	208/230/460/575	3	1750	6.3/6/3/2.3	34.5'	190	25.5"	21"	149	198
SKG22C	3"	3	208/230/460/575	3	1750	9.45/9/4.5/3.2	41'	300	26.38"	21"	157	205
SKG37C	3"	5	208/230/460/575	3	1750	14.7/14/7/5.5	42'	410	29"	21"	185	235

## **PUMP SLIDE RAIL ASSEMBLIES**

CAST IRON	316 STAINLESS STEEL	SIZE	PUMP SIZES
SR80-ANSI	SRX80SS-ANSI	3"	15C, 22C, 37C

High Temperature SKG pumps also available. See BJM's FAHRENHEIT® Series.

#### SPECIFICATION SUBJECT TO CHANGE WITH OUT NOTICE

WARNING: NOT FOR USE IN ANY FLAMMABLE LIQUIDS



123 Spencer Plain Road P.O. Box 1138 Old Saybrook, CT 06475

Tel: (860)-399-5937 Fax: (860)-399-7784 Web: www.bjmpumps.com